
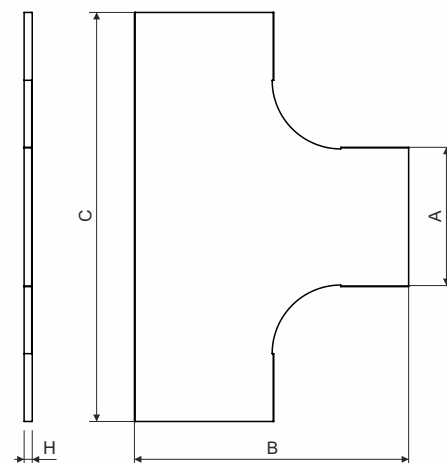


type number	for width of cable tray (mm)	A (mm)	B (mm)	C (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/pc)	🔥
<b>VT 50_S</b>	50	50	254	453	12	0,55	0,22	🔥
<b>VT 50_F</b>						0,8	0,36	🔥
<b>VT 75_S</b>	75	75	279	478	12	0,55	0,30	🔥
<b>VT 75_F</b>						0,8	0,50	🔥
<b>VT 100_S</b>	100	100	304	503	12	0,55	0,39	🔥
<b>VT 100_F</b>						0,8	0,65	🔥
<b>VT 150_S</b>	150	150	354	553	12	0,55	0,57	🔥
<b>VT 150_F</b>						0,8	0,97	🔥
<b>VT 200_S</b>	200	200	404	603	12	0,8	1,14	🔥
<b>VT 200_F</b>						0,8	1,33	🔥
<b>VT 300_S</b>	300	300	504	703	12	1,0	2,32	🔥
<b>VT 300_F</b>						1,0	2,69	🔥
<b>VT 400_S</b>	400	400	604	803	15	1,0	3,40	🔥
<b>VT 400_F</b>						1,0	3,95	🔥
<b>VT 500_S</b>	500	500	704	903	15	1,0	4,62	🔥
<b>VT 500_F</b>						1,0	5,36	🔥
<b>VT 600_S</b>	600	600	804	1003	15	1,0	6,00	🔥
<b>VT 600_F</b>						1,0	6,96	🔥

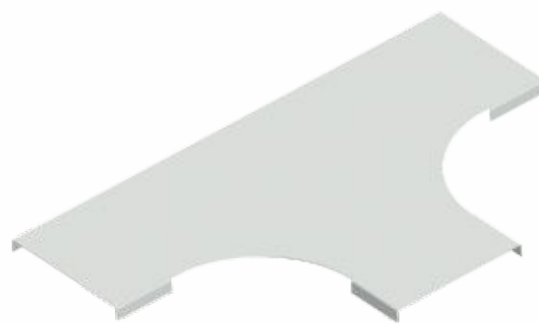

product description: This cover is used to cover the T-piece.  
To fix the cover use 6 pcs of cover fixtres VU or NUV.  
These items can also be ordered in varnished version.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm  
F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895P 90-R  
DIN 4102-12E 90  
STN 92 0205PS 90  
Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

- 🔥 products are approved for standard constructions
- 🔥 products are approved for non-standard constructions

storage: ČSN EN 60721-3-1

